

SanDAS

Sanlien Data Acquisition System

MODBUS-RTU 新介面 RS-485

簡單 × 直覺


SHAKE SS300


地震開關

- ⊖ RLY1
- ⊖ RLY2
- ⊖ DIO
- ⊖ D11
- ⊖ D12
- ⊖ D13

圖·文 草地樹子

產品新訊

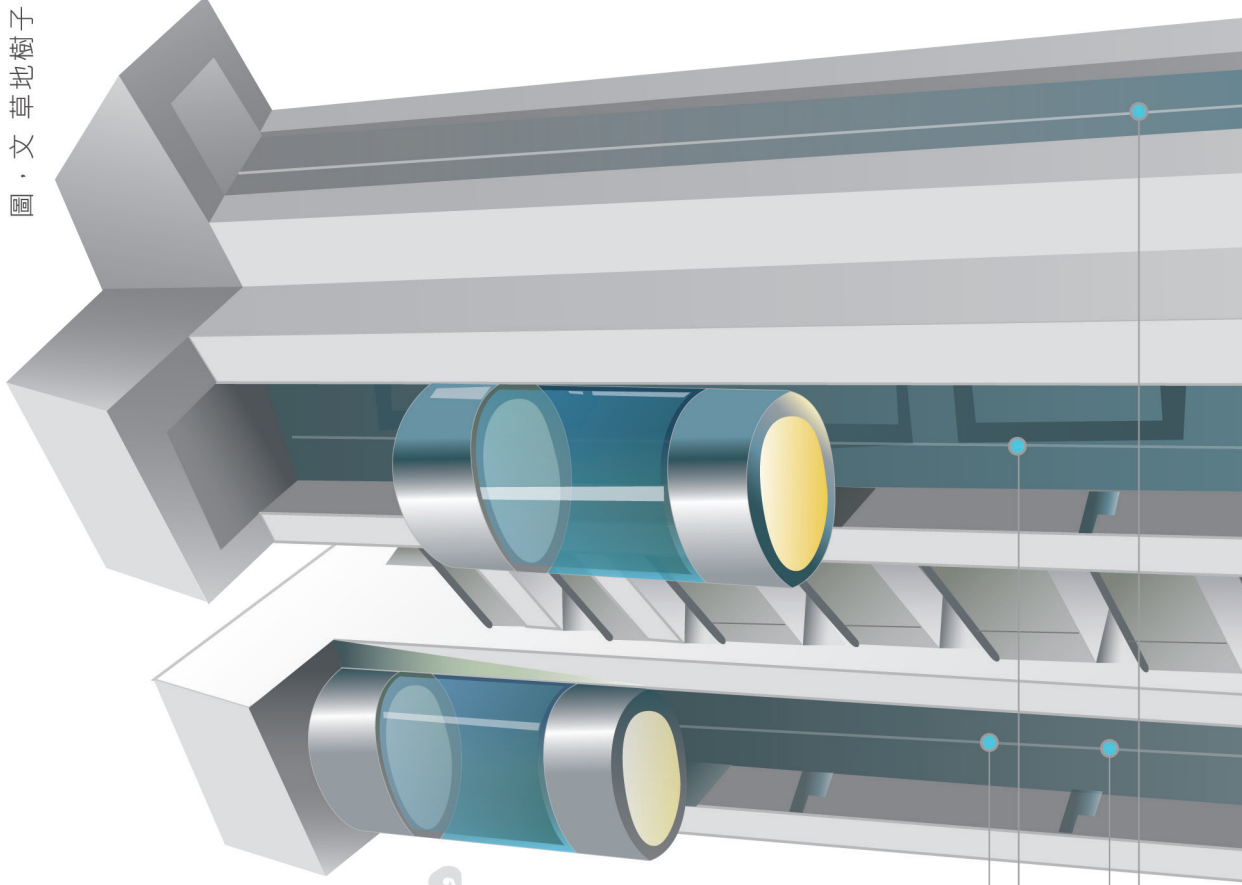

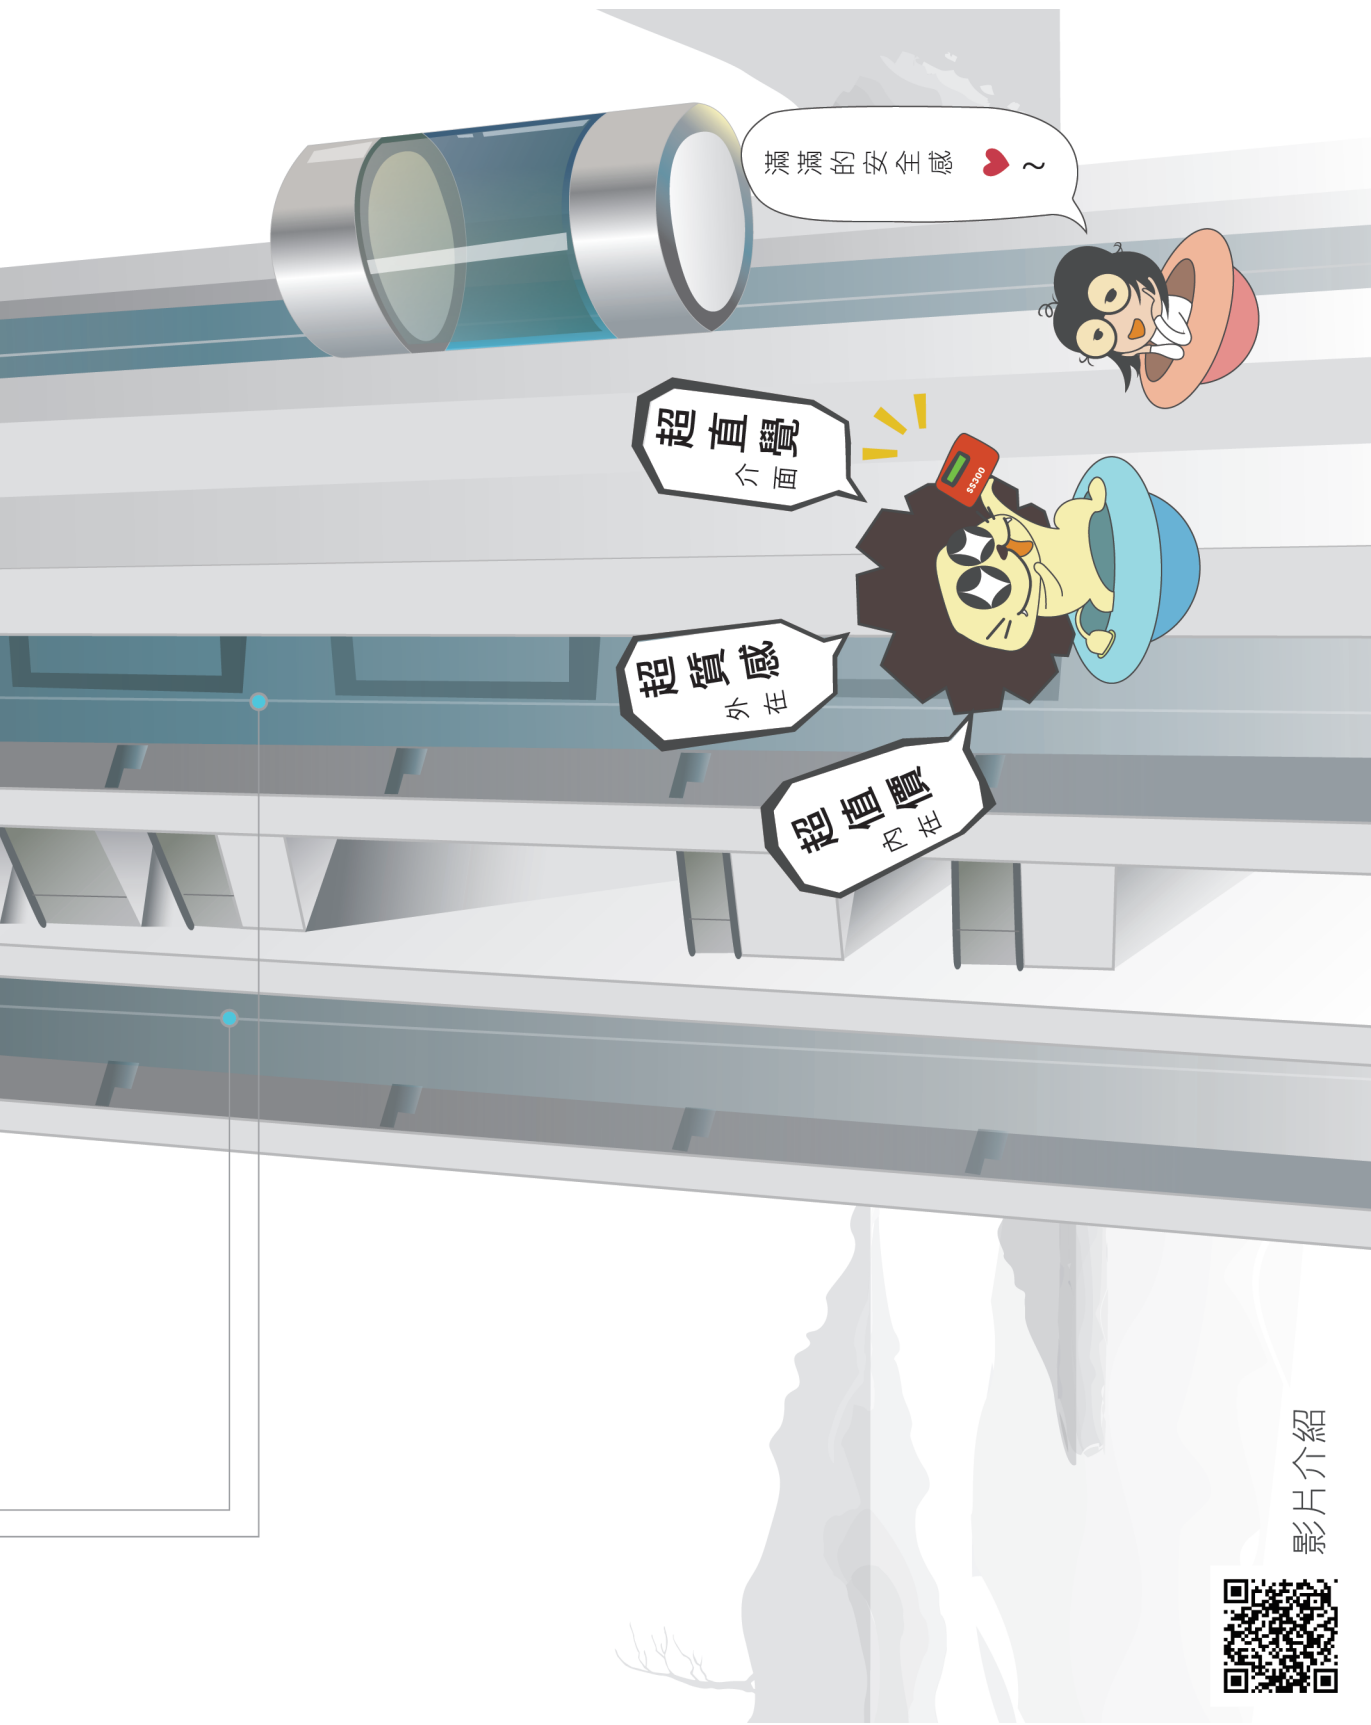

影片介紹



System

Sensor LTA Ready

Offsetting RTC Busy

Trigger

Flag PGA PGV STA / LTA

Event 超好懂耶？

DI/RLY

DI 0 1

RLY 0 1 2 3 4 5

燈號分類呀
好用心
的

Test

RLY 0 1 2 Reset

gal 20 count 200



CWB 1 1.0

Thur. 2022/02/24-14:44:15

Real-Time Summary per second

	STA/LTA 0.8 [Ratio]	Component of Vector [gal]	Peak Acc. along Axis [gal]	Component of Vector [mm/s]	Peak Vel. along Axis [mm/s]
X	1.5	0.3	0.5	0.4	0.1
Y	0.0	0.0	1.4	0.0	0.4
Z	0.0	0.0	0.3	0.0	0.2

CWB 2 2.0

超震度階儀表板

Event

	RLY 0 <input checked="" type="checkbox"/> RLY 1 <input checked="" type="checkbox"/> RLY 2 <input checked="" type="checkbox"/>	Component of Vector [gal]	Peak Acc. along Axis [gal]	Component of Vector [mm/s]	Peak Vel. along Axis [mm/s]
X	5.6	-1.2	2.0	2.3	1.0
Y	-5.3	-5.3	5.3	-1.9	1.9
Z	1.2	1.2	1.2	-0.8	1.5

阿阿...

SanDAS 全新Modbus顯示介面

